


Memento

Type: Behavioral

What it is:

Without violating encapsulation, capture and externalize an object's internal state so that the object can be restored to this state later.

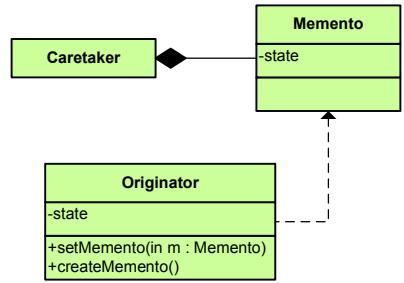


Observer

Type: Behavioral

What it is:

Define a one-to-many dependency between objects so that when one object changes state, all its dependents are notified and updated automatically.

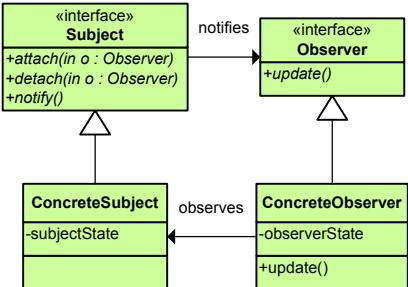


State

Type: Behavioral

What it is:

Allow an object to alter its behavior when its internal state changes. The object will appear to change its class.

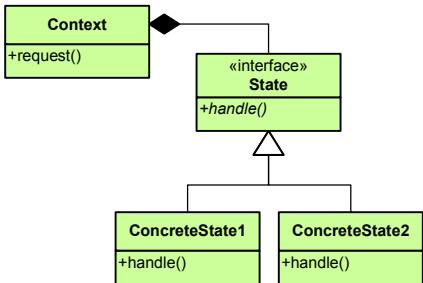


Strategy

Type: Behavioral

What it is:

Define a family of algorithms, encapsulate each one, and make them interchangeable. Lets the algorithm vary independently from clients that use it.

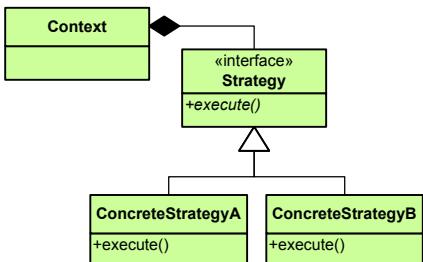


Template Method

Type: Behavioral

What it is:

Define the skeleton of an algorithm in an operation, deferring some steps to subclasses. Lets subclasses redefine certain steps of an algorithm without changing the algorithm's structure.





Visitor

Type: Behavioral

What it is:

Represent an operation to be performed on the elements of an object structure. Lets you define a new operation without changing the classes of the elements on which it operates.

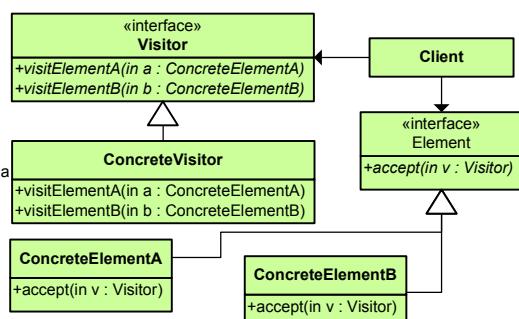

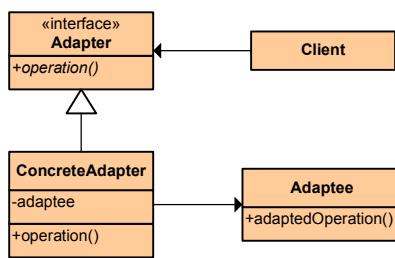

Adapter

Type: Structural

What it is:
Convert the interface of a class into another interface clients expect. Lets classes work together that couldn't otherwise because of incompatible interfaces.



Client


Proxy

Type: Structural


What it is:
Provide a surrogate or placeholder for another object to control access to it.




Client




«interface» Subject
+request()



RealSubject
+request()




Proxy
+request()

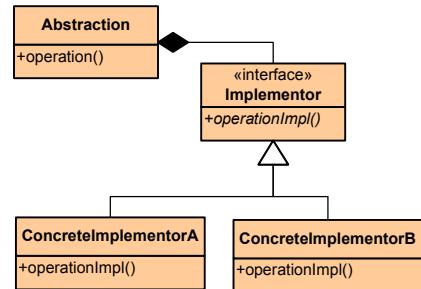

Bridge

Type: Structural


What it is:
Decouple an abstraction from its implementation so that the two can vary independently.

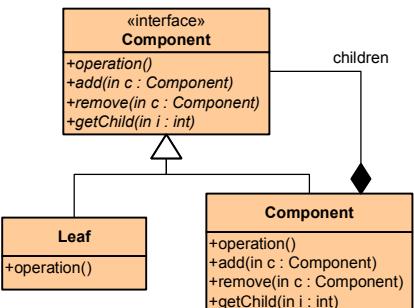

Composite

Type: Structural


What it is:
Compose objects into tree structures to represent part-whole hierarchies. Lets clients treat individual objects and compositions of objects uniformly.

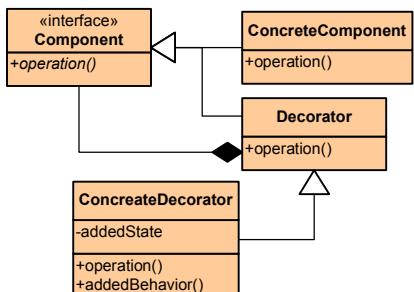

Decorator

Type: Structural


What it is:
Attach additional responsibilities to an object dynamically. Provide a flexible alternative to sub-classing for extending functionality.

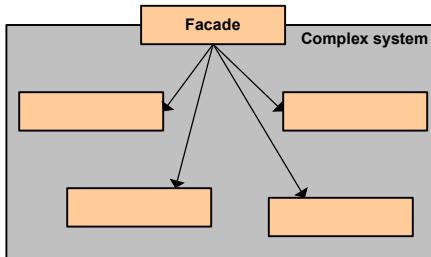

Facade

Type: Structural

What it is:
Provide a unified interface to a set of interfaces in a subsystem. Defines a high-level interface that makes the subsystem easier to use.

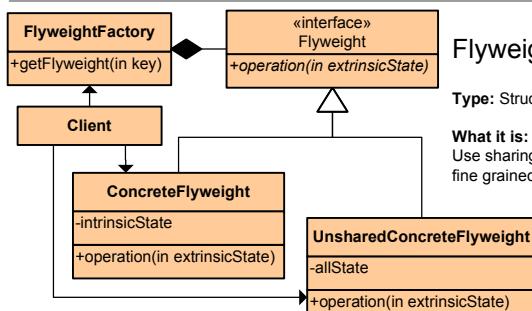

Flyweight


Type: Structural

What it is:
Use sharing to support large numbers of fine grained objects efficiently.

Factory Method

Type: Creational


What it is:
Define an interface for creating an object, but let subclasses decide which class to instantiate. Lets a class defer instantiation to subclasses.

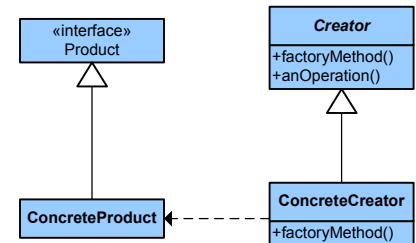

Prototype

Type: Creational

What it is:
Specify the kinds of objects to create using a prototypical instance, and create new objects by copying this prototype.

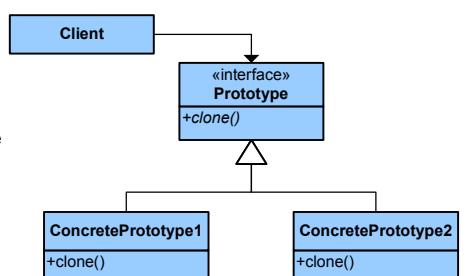

Singleton

Type: Creational

What it is:
Ensure a class only has one instance and provide a global point of access to it.

